

ISUZU

SERIES F-11 T VERSION Euro VI OBD-D




EDITION 2020

Série Bleu

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDl Europe can be considered responsible if any of this information is incorrect.

Suspensions mechanic Série Bleu OBD-D (11 ton)

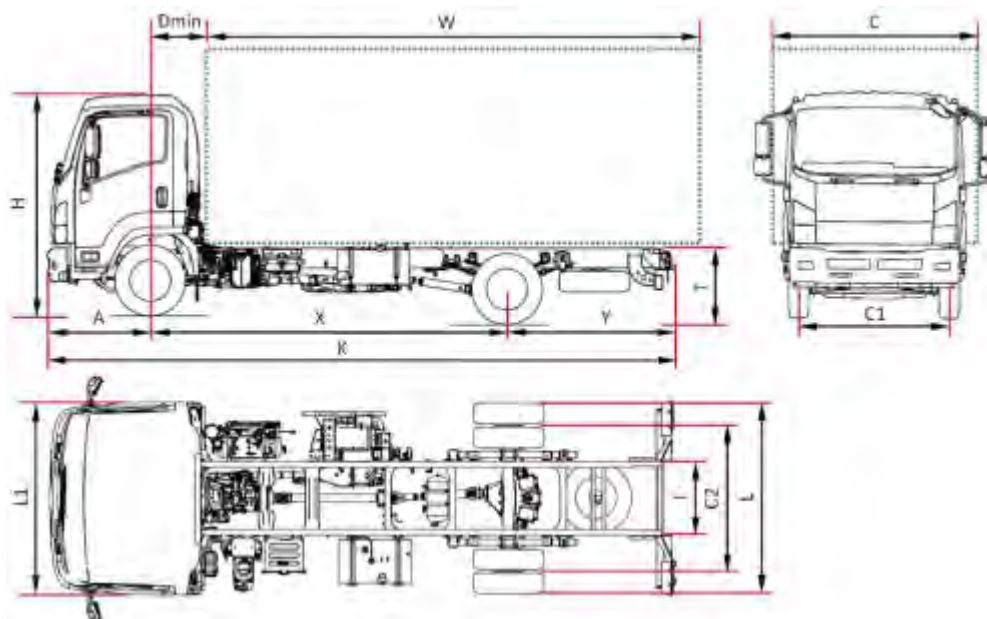

F 11		F 11 H
Wheelbase	X	3410
Overall length	K	6010
Body length min. ⁽¹⁾	W	4130
Body length Max. ⁽¹⁾	W	4480
Rear overhang	Y	1430
Chassis height	T	875
Overall height	H	2565
Rear axle width	L	2170 (2220 mm rear light width)
Cab width ⁽²⁾	L1	2195
Body width ⁽³⁾	C	2550
Front axle to back of cab	D min	710
Front overhang	A	1170
Frame internal size	I	840
Front track	C1	1795
Rear track	C2	1660
Minimum Road Clearance	-	185
Turning diameter (m) ⁽⁴⁾		11,1
WEIGHT (kg)		
Unladen weight ⁽⁵⁾		3640
Unladen weight front axle		2375/1265
Gross Vehicle Weight (GVW)		11000
Front/rear total weight		4000 / 7600
Max trailer weight unbraked / Max trailer weight braked		750 / 3500


1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2220/2286 – 2286/2406 – 2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +30 kg

F 11 - Wheelbase (mm) H 3410

JANUARY 2020

Equipment	NEES 2 + HSA	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Speed limiter (90km/h) • Rear lock differential • Engine exhaust brake • Steering adjustable (tilting and height) 	<ul style="list-style-type: none"> • Air conditioning • Air spring seat • Power operated windows • Side mirrors heated and electricReverse warning buzzer • Radio DAB+ with USB 	<ul style="list-style-type: none"> • Head lamps control levelling • Immobilizer • Central locking with remote control • Cruise control • Day-time running lights • Fog lamps Fr and Rr
Optional	. Body builder Controller	
Engine	ISUZU 4HK1E6H Diesel Engine 4 cylinders Intercooler, common-rail with direct injection common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm ³ POWER 177kW (240 CV) a 2400 rpm TORQUE 765 Nm/1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS (Advanced Emergency Braking System) SRS Driver Airbag	
Tank	L 140	L 16 Ad-Blue®
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 4.333 (39/9)	
Transmission control	Manual	NEES 2 + Kick down
Dimensions of the chassis	Width 60 mm, Height 225 mm (only W/B H height minimum 124,6 mm) Thickness 6 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 235/75 R17,5C simple. Rear 235/75 R17,5C dual.	
Brakes	Freni a tamburo anteriori e posteriori. A norme CEE con ABS a 4 canali, sistema pneumatico Full Air a due circuiti indipendenti e comando elettronico EBS (Brake by wire). Freno motore sullo scarico. Freno di stazionamento pneumatico sull'asse posteriore	
Suspensions	Front and rear: Multi taper leaf spring. Front and rear stabilizer shaft	
Electric system	2 battery 110 A - System 24V - Generator 90A	

Suspensions air Série Bleu OBD-D (11 ton)

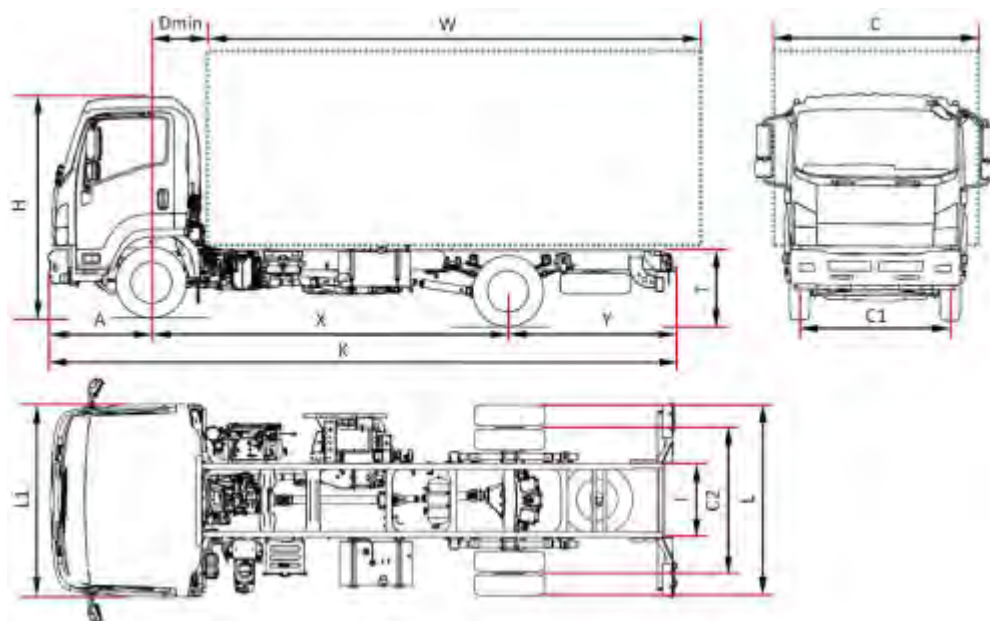

F 11		F 11 J	F 11 K	F 11 M	F 11 N
Wheelbase	X	3790	4060	4660	4990
Overall length	K	6580	7000	7900	8350
Body length min. ⁽¹⁾	W	4700	5120	6020	6530
Body length Max. ⁽¹⁾	W	5050	5470	6370	6880
Rear overhang	Y	1620	1770	2070	2190
Chassis height	T	760			
Overall height	H	2560			
Rear axle width	L	2170 (2220 mm rear light width)			
Cab width ⁽²⁾	L1	2195			
Body width ⁽³⁾	C	2550			
Front axle to back of cab	D min	710			
Front overhang	A	1170			
Frame internal size	I	840			
Front track	C1	1795			
Rear track	C2	1660			
Minimum Road Clearance	-	185			
Turning diameter (m) ⁽⁴⁾		12,2	12,9	14,6	15,6
WEIGHT (kg)					
Unladen weight ⁽⁵⁾		3765	3780	3825	3855
Unladen weight front axle		2355/1410	2350/1430	2375/1450	2395/1460
Gross Vehicle Weight (GVW)		11000			
Front/rear total weight		4000 / 7600			
Max trailer weight unbraked / Max trailer weight braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2220/2286 – 2286/2406 – 2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +30 kg

F 11 - Wheelbase (mm) J 3790 - K 4060 - M 4660 - N 4990

JANUARY 2020

Equipment	NEES 2 + HSA	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Air conditioning • Speed limiter (90km/h) • Engine exhaust brake • Air spring seat 	<ul style="list-style-type: none"> • Steering adjustable (tilting and height) • Power operated windows • Side mirrors heated and electric • Reverse warning buzzer • Head lamps control levelling 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Cruise control • Day-time running lights • Fog lamps Fr and Rr • Radio DAB+ with USB
Optional	• Body builder Controller	
Engine	<p>ISUZU 4HK1E6H Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm³ POWER 177kW (240 CV) a 2400 rpm TORQUE 765 Nm/1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.</p>	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS (Advanced Emergency Braking System) SRS Driver Airbag	
Tank	L 140	L 16 Ad-Blue®
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 4.333 (39/9)	
Transmission control	Manual	NEES 2 + Kick down
Dimensions of the chassis	Width 60 mm, Height 225 mm, Thickness 6 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 235/75 R17,5C simple. Rear 235/75 R17,5C dual.	
Brakes	Freni a tamburo anteriori e posteriori. A norme CEE con ABS a 4 canali, sistema pneumatico Full Air a due circuiti indipendenti e comando elettronico EBS (Brake by wire). Freno motore sullo scarico. Freno di stazionamento pneumatico sull'asse posteriore	
Suspensions	Front: Multi taper leaf spring. Rear: 4-bag Air Suspension with height control. Front and rear stabilizer shaft	
Electric system	2 battery 110 A - System 24V - Generator 90A	

ISUZU

SERIES N - F VERSION Euro VI OBD-D

For further information
ISUZU MOTORS LIMITED

www.isuzu.ba

