

ISUZU

SERIES F-14 T
VERSION Euro VI OBD-D




EDITION 2020

Série Bleu

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDT Europe can be considered responsible if any of this information is incorrect.


Suspensions mechanic Série Bleu OBD-D (14 ton)

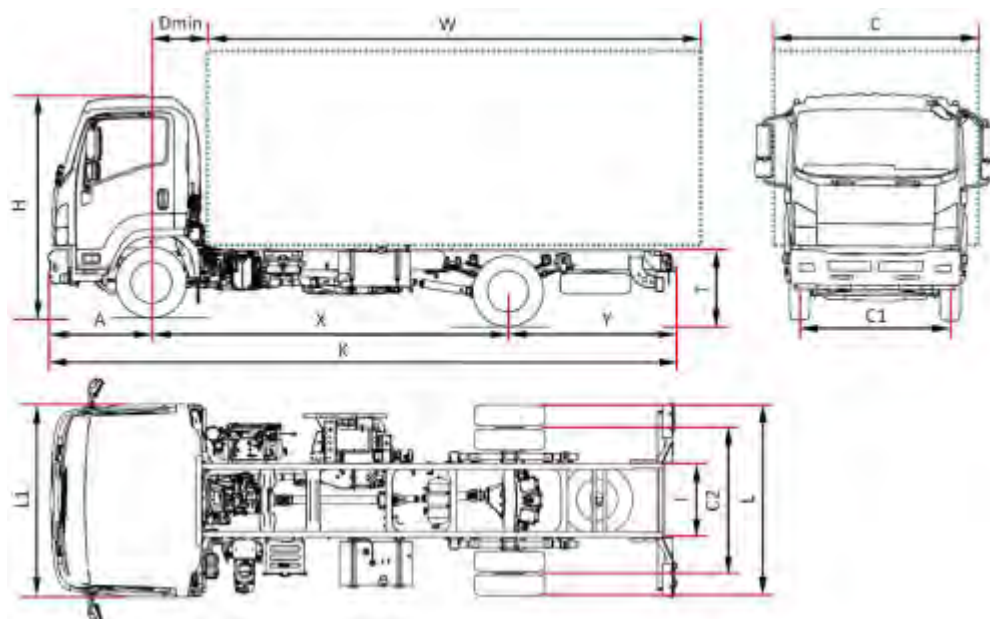

F 14		F 14 J
Wheelbase	X	3790
Overall length	K	6610
Body lenght min. ⁽¹⁾	W	4400
Body lenght Max. ⁽¹⁾	W	4500
Rear overhang	Y	1645
Chassis height	T	890
Overall height	H	2600
Rear axle width	L	2255
Cab width ⁽²⁾	L1	2195
Body width ⁽³⁾	C	2550
Front axle to back of cab	D min	710
Front overhang	A	1175
Frame internal size	I	840
Front track	C1	1800
Rear track	C2	1705
Minimum Road Clearance	-	215
Turning diameter (m) ⁽⁴⁾		13,7
PESI (kg)		
Unladen weight ⁽⁵⁾		4100
Unladen weight front axle		2620/1480
Gross Vehicle Weight (GVW)		14000
Front/rear total weight		5000 / 9000
Max trailer weight unbraked / Max trailer weight braked		750 / 3500

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2255/2286 – 2286/2406 – 2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded.NEES +30 kg

Suspensions air Série Bleu OBD-D (14 ton)

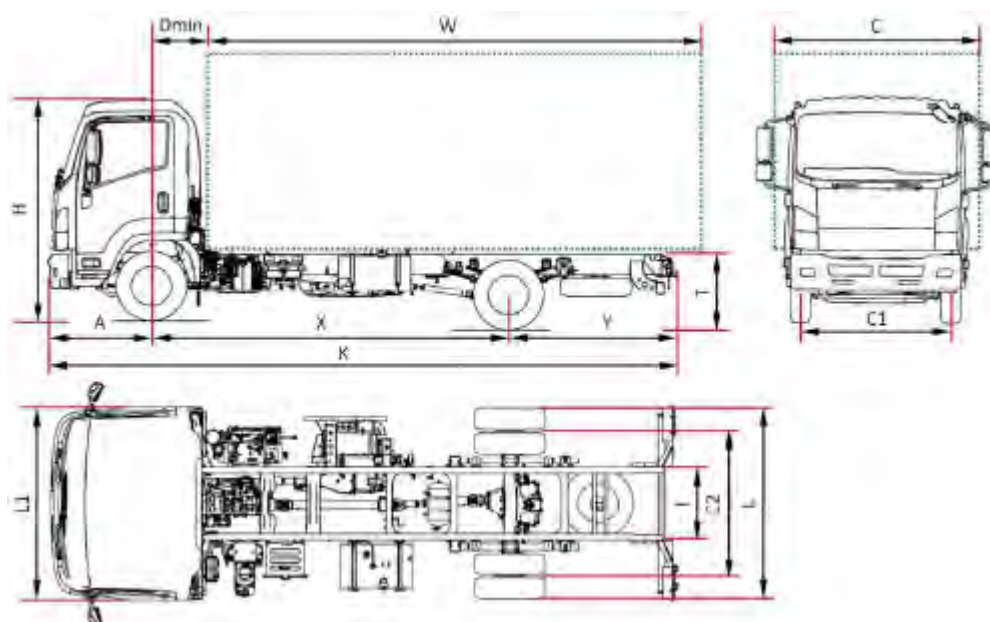

F 14		F 14 J	F 14 L	F 14 N	F 14 Q
Wheelbase	X	3790	4360	4990	5320
Overall length	K	6610	7480	8380	8610
Body length min. ⁽¹⁾	W	4735	5605	6505	6805
Body length Max. ⁽¹⁾	W	5085	5955	6855	7155
Rear overhang	Y	1645	1945	2215	2185
Chassis height	T	785			
Overall height	H	2550			
Rear axle width	L	2225			
Cab width ⁽²⁾	L1	2195			
Body width ⁽³⁾	C	2550			
Front axle to back of cab	D min	710			
Front overhang	A	1175			
Frame internal size	I	840			
Front track	C1	1800			
Rear track	C2	1670			
Turning diameter (m) ⁽⁴⁾		13,7	15,5	17,5	18,6
PESI (kg)					
Unladen weight ⁽⁵⁾		4270	4330	4400	4410
Unladen weight front axle		2685/1585	2735/1595	2775/1625	2790/1990
Gross Vehicle Weight (GVW)		14000			
Front/rear total weight		5000 / 9000			
Max trailer weight unbraked / Max trailer weight braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2220/2286 – 2286/2406 – 2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +30 kg

F 14 - Wheelbase (mm) J 3790 - L 4360 - N 4990 - Q 5320

JANUARY 2020

Equipment	NEES 2 + HSA	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Air conditioning • Speed limiter (90km/h) • Engine exhaust brake 	<ul style="list-style-type: none"> • Air spring seat • Power operated windows • Side mirrors heated and electric • Steering adjustable (tilting and height) • Radio DAB+ with USB 	<ul style="list-style-type: none"> • Head lamps control levelling • Immobilizer • Central locking with remote control • Cruise control • Day-time running lights • Fog lamps Fr and Rr
Optional	. Body builder Controller	
Engine	<p>ISUZU 4HK1E6H Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm³ POWER 177kW (240 CV) a 2400 rpm TORQUE 765 Nm/1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.</p>	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS – Sistema di allerta superamento corsia AEBS (Advanced Emergency Braking System) SRS Driver Airbag	
Tank	L 140	L 16 Ad-Blue®
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 5.571 (39/7)	
Transmission control	Manual	NEES 2 + Kick down
Dimensions of the chassis	Width 60 mm, Height 225 mm, Thickness 6 mm	
Number of seats	3	
Tires	Front: 265/70 R19,5C simple. Rear 265/70 R19,5C dual	
Brakes	Freni a tamburo anteriori e posteriori. A norme CEE con ABS a 4 canali, sistema pneumatico Full Air a due circuiti indipendenti e comando elettronico EBS (Brake by wire). Freno motore sullo scarico. Freno di stazionamento pneumatico sull'asse posteriore	
Suspensions	Front: Multi taper leaf spring.Rear: 4-bag Air Suspension with height control.Front and rear stabilizer shaft.	
Electric system	2 battery 110 A - System 24V - Generator 90A	

ISUZU

SERIES N - F

VERSION Euro VI OBD-D

For further information
ISUZU MOTORS LIMITED

www.isuzu.ba

