

ISUZU


SERIES N-3,5 T
VERSION Euro VI OBD-D



EDITION 2020

Série Bleu

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDT Europe can be considered responsible if any of this information is incorrect.

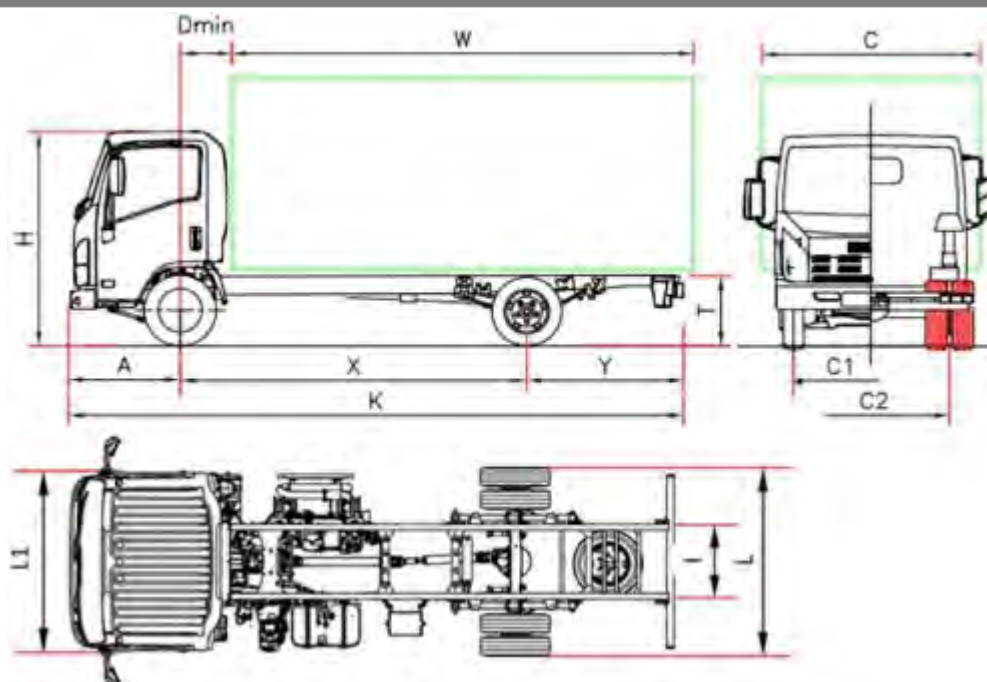

L 35		L35 F	L 35 H	L 35 K	L 35 L
Wheelbase	X	2750	3350	3845 ⁽⁵⁾	4175 ⁽⁵⁾
Overall length	K	5295	6015	7032	7565
Body length min. ⁽¹⁾	W	3535	4255	5272	5805
Body length Max. ⁽¹⁾	W	3820	4490	5502	6030
Rear overhang	Y	1435	1555	2077	2280
Chassis height	T	730		720	
Overall height	H	2150		2160	
Rear axle width	L			1865	
Cab width ⁽²⁾	L1			1815	
Body width ⁽³⁾	C			2120	
Front axle to back of cab	D min			650	
Front overhang	A			1110	
Frame internal size	I			700	
Front track	C1			1475	
Rear track	C2			1425	
Minimum Road Clearance	-			190	
Turning diameter (m) ⁽⁴⁾	-	11,3	13,5	15,2	16,4
WEIGHT (kg)					
Unladen weight ⁽⁶⁾		2240	2300	2350	2400
Unladen weight front axle		1580/660	1600/700	1625/725	1650/750
Minimum weight vehicle equipped				2585	
Gross Vehicle Weight (GVW)				3500	
Front/rear total weight				2100 / 2435	
Max trailer weight unbraked / Max trailer weight braked				750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).

2. Excluding turn signal and side mirrors

3. Possible widths with optional mirror brackets 1865/1945 – 1945/2120 – 2120/2275

4. Curb to curb turning diameter


5. Wheelbase modified (see thw optional equipment)

6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg (25/10)

L 35 - Wheelbase (mm) F 2750 - H 3350 - K 3845 - L 4175

JANUARY 2020

Equipment	NEES 2 (only Wheelbase F)	
	Right-hand drive (*)	
(*) only Wheelbase F e NEES 2; (*)according to availability		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Reverse warning buzzer • Immobilizer • Central locking with remote control • Suspended seat • Power operated windows • Day-time running lights • Fog lamps Fr and Rr • Radio DAB+ with USB • Head lamps control levelling • Steering adjustable (tilting and height) 		
Optional	. Air conditioning	
	. Wheelbase modified	
	. Body builder Controller	
Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 CV) 2800 rpm TORQUE 375 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Tank	L 68 Wheelbase F – L 93 Wheelbase H-K-L	L 16 Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 65 mm, Height 180 mm, Thickness 4 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

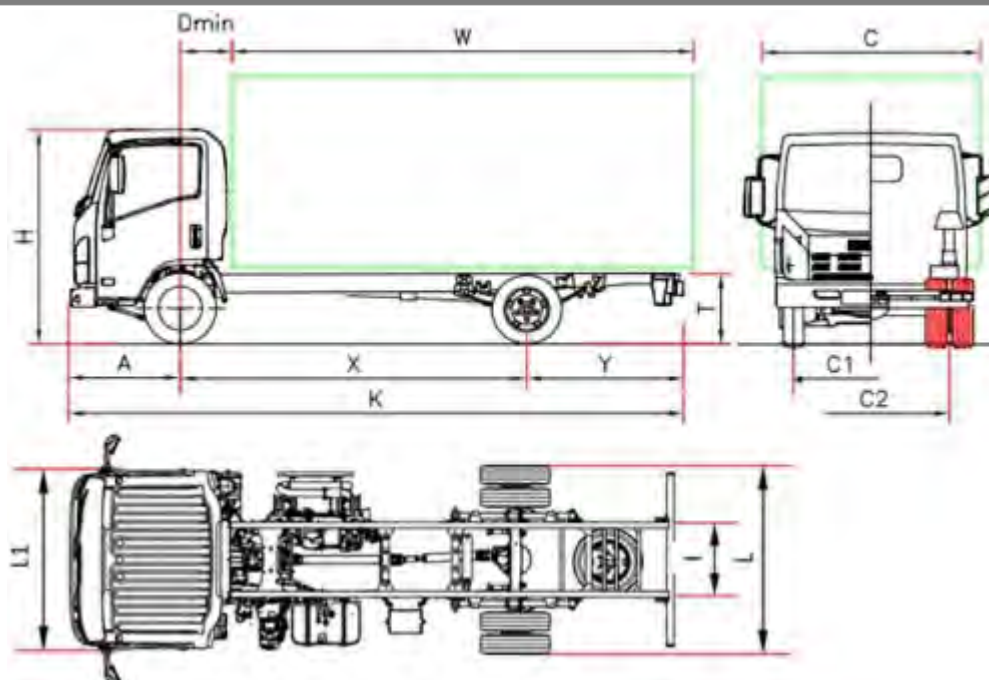


L 35		L35 F	L 35 H
Wheelbase	X	2760	3360
Overall length	K	5295	6015
Body length min. ⁽¹⁾	W	3545	4265
Body length Max. ⁽¹⁾	W	3830	4500
Rear overhang	Y	1435	1555
Chassis height	T		715
Overall height	H	2150	2160
Rear axle width	L		1860
Cab width ⁽²⁾	L1		1815
Body width ⁽³⁾	C		2120
Front axle to back of cab	D min		650
Front overhang	A		1100
Frame internal size	I		700
Front track	C1		1400
Rear track	C2		1425
Minimum Road Clearance	-		180
Turning diameter (m) ⁽⁴⁾	-	10,0	11,9
WEIGHT (kg)			
Unladen weight ⁽⁵⁾		2200	2250
Unladen weight front axle		1530/670	1550/700
Minimum weight vehicle equipped			2585
Gross Vehicle Weight (GVW)			3500
Front/rear total weight		2100 / 2435	
Max trailer weight unbraked / Max trailer weight braked		750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 1860/1945 – 1945/2120 – 2120/2275
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg (25/10)

L 35 ADAPTOR - Wheelbase (mm) F 2760 - H 3360

JANUARY 2020

Equipment	NEES 2 (only Wheelbase H)	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Suspended seat • Immobilizer 	<ul style="list-style-type: none"> • Reverse warning buzzer • Central locking with remote control • Power operated windows • Day-time running lights 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Fog lamps Fr and Rr • Head lamps control levelling • Steering adjustable (tilting and height)
Optional	<ul style="list-style-type: none"> • Air conditioning • Body builder Controller 	
Engine	<p>ISUZU 4JJ1E6N Diesel Engine 4 cylinders Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm³ POWER 110kW (150 CV) a 2800 rpm. TORQUE. 375 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.</p>	
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Tank	L 68 Wheelbase F – L 93 Wheelbase H	L 16 Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 50 mm, Height 180 mm, Thickness 4 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front: Independent suspension with coil spring and double wishbone. Rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

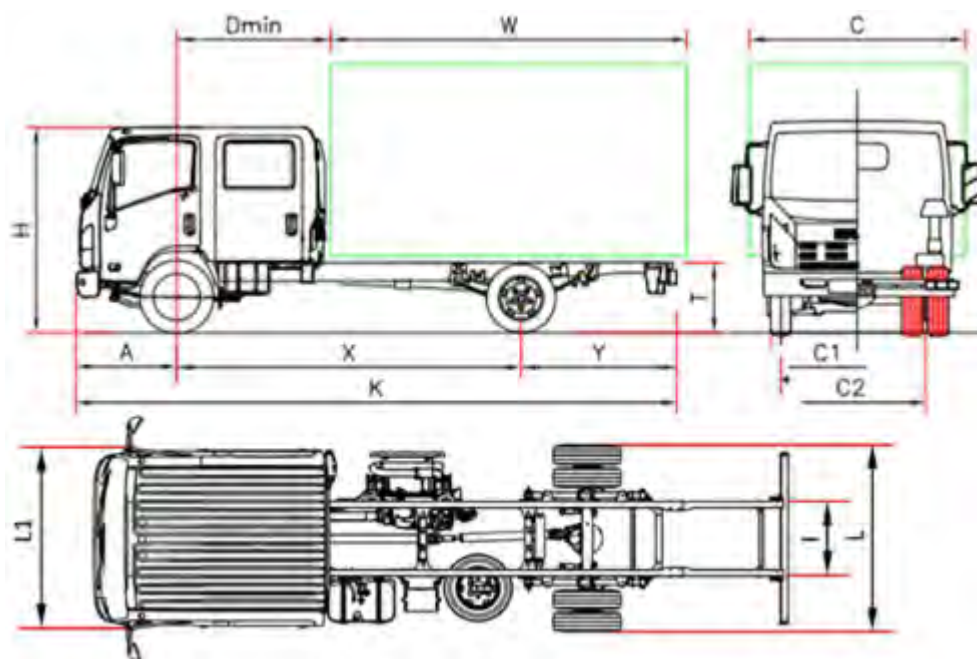


L 35 CREW		L35 H
Wheelbase	X	3350
Overall length	K	6015
Body lenght min. ⁽¹⁾	W	3205
Body lenght Max. ⁽¹⁾	W	3570
Rear overhang	Y	1555
Chassis height	T	735
Overall height	H	2270
Rear axle width	L	1865
Cab width ⁽²⁾	L1	1815
Body width ⁽³⁾	C	2120
Front axle to back of cab	D min	1700
Front overhang	A	1110
Frame internal size	I	700
Front track	C1	1475
Rear track	C2	1425
Minimum Road Clearance	-	165
Turning diameter (m) ⁽⁴⁾	-	13,5
WEIGHT (kg)		
Unladen weight ⁽⁵⁾		2465
Unladen weight front axle		1705/760
Minimum weight vehicle equipped		2585
Gross Vehicle Weight (GVW)		3500
Front/rear total weight		2100 / 2435
Max trailer weight unbraked / Max trailer weight braked		750 / 3500

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 1865/1945 – 1945/2120 – 2120/2275
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg

L 35 CREW - Wheelbase (mm) H 3350

JANUARY 2020

Equipment	NEES 2 (only Wheelbase H)	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Immobilizer 	<ul style="list-style-type: none"> • Reverse warning buzzer • Central locking with remote control • Power operated windows • Day-time running lights 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Fog lamps Fr and Rr • Head lamps control levelling • Steering adjustable (tilting and height)
Optional	<ul style="list-style-type: none"> . Air conditioning . Body builder Controller 	
Engine	<p>ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm³ POWER: 110kW (150 CV) a 2800 rpm TORQUE max. 375 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS: EURO VI OBD-D.</p>	
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Tank	L 68	L 16 Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 65 mm, Height 180 mm, Thickness 4 mm	
Number of seats	6	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

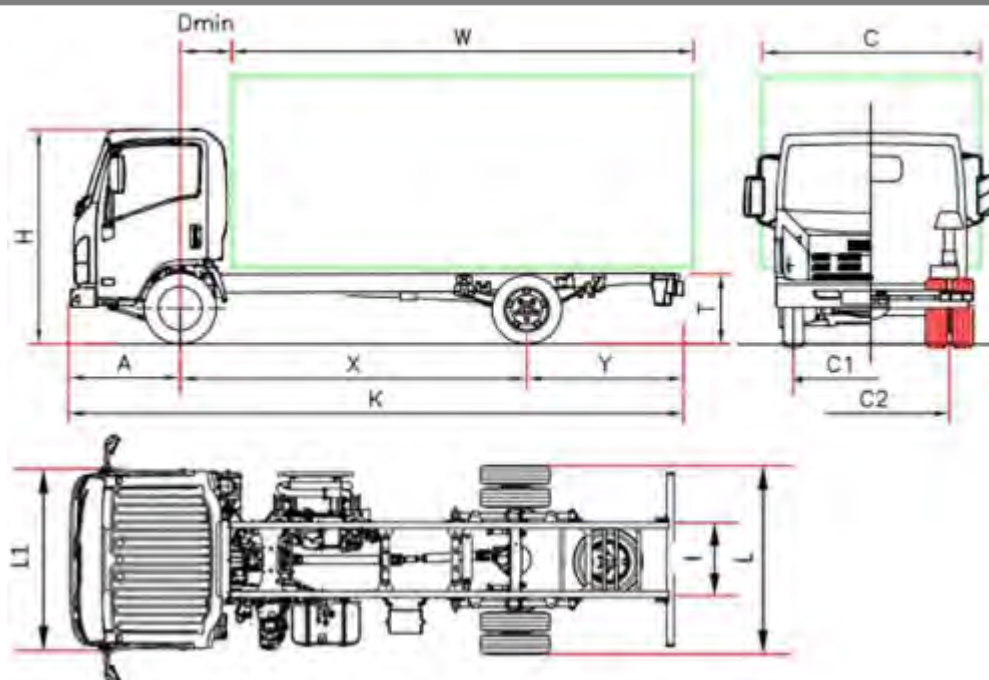

N 35		N35 F	N 35 H	N 35 K	N 35 L
Wheelbase	X	2800	3395	3845 ⁽⁵⁾	4175 ⁽⁵⁾
Overall length	K	5235	6085	7032	7565
Body length min. ⁽¹⁾	W	3415	4265	5212	5745
Body length Max. ⁽¹⁾	W	3710	4555	5442	5970
Rear overhang	Y	1325	1580	2077	2280
Chassis height	T	730	720	720	720
Overall height	H	2225			
Rear axle width	L	1925			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	C	2345			
Front axle to back of cab	D min	710 ⁽⁷⁾			
Front overhang	A	1110			
Frame internal size	I	750			
Front track	C1	1680			
Rear track	C2	1485			
Minimum Road Clearance	-	190			
Turning diameter (m) ⁽⁴⁾	-	10,0	11,8	13,2	14,2
WEIGHT (kg)					
Unladen weight ⁽⁶⁾		2385	2430	2480	2530
Unladen weight front axle		1670/715	1680/750	1705/775	1730/800
Minimum weight vehicle equipped		2585			
Gross Vehicle Weight (GVW)		3500			
Front/rear total weight		2100 / 2435			
Max trailer weight unbraked / Max trailer weight braked		750/ 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets: 2040/2170 – 2170/2345 – 2345/2500
4. Diametro di volta a terra (impronta pneumatici)
5. Wheelbase modified (see thw optional equipment)
6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES II 650.

N 35 - Wheelbase (mm) F 2800 - H 3395 - K 3845 - L 4175

JANUARY 2020

Equipment	NEES 2	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Suspended seat • Power operated windows 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Fog lamps Fr and Rr • Head lamps control levelling • Day-time running lights • Steering adjustable (tilting and height)
Optional	<ul style="list-style-type: none"> . Air conditioning . Wheelbase modified . Body builder Controller 	
Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 CV) a 2800 rpm TORQUE 375 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Tank	L 90	L 16 Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 70 mm, Height 214 mm, Thickness 5 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

ISUZU

SERIES N - F

VERSION Euro VI OBD-D

For further information
ISUZU MOTORS LIMITED

www.isuzu.ba

