

ISUZU


SERIES N-5,5 T
VERSION Euro VI OBD-D



EDITION 2020

Série Bleu

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDT Europe can be considered responsible if any of this information is incorrect.

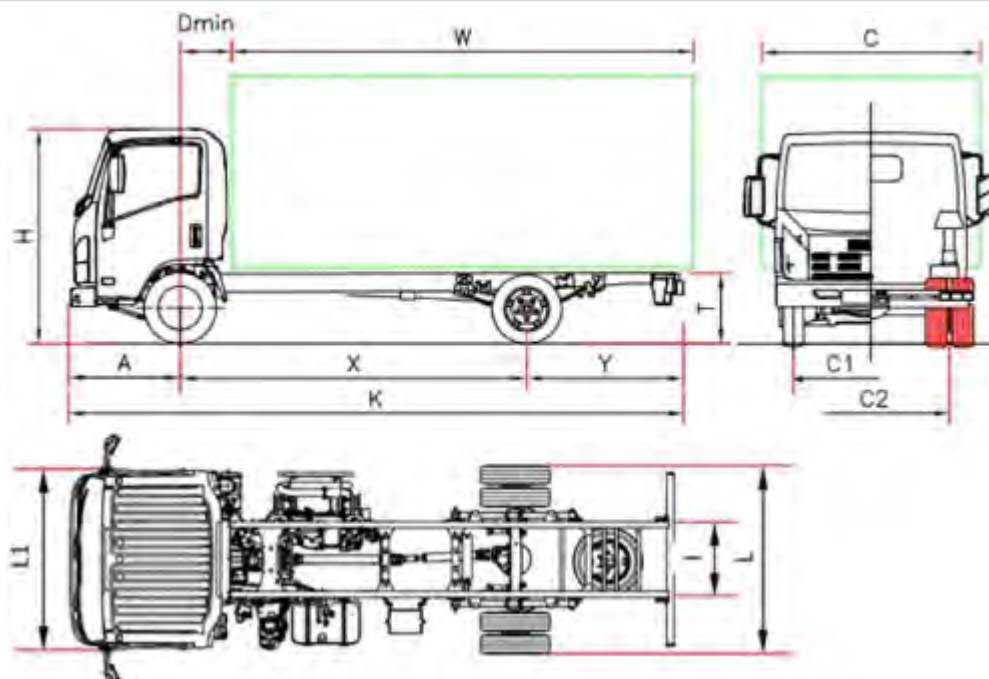

M 55		M55 E	M55 F	M55 H
Wheelbase	X	2500 ⁽⁵⁾	2750	3350
Overall length	K	5045	5295	6020
Body length min. ⁽¹⁾	W	3285	3535	4260
Body length Max. ⁽¹⁾	W	3475	3820	4490
Rear overhang	Y	1435	1435	1560
Chassis height	T	740	740	735
Overall height	H	2150	2150	2160
Rear axle width	L		1865	
Cab width ⁽²⁾	L1		1815	
Body width ⁽³⁾	C		2120	
Front axle to back of cab	D min		650	
Front overhang	A		1110	
Frame internal size	I		700	
Front track	C1		1475	
Rear track	C2		1425	
Minimum Road Clearance	-		190	
Turning diameter (m) ⁽⁴⁾	-	10,4	11,3	13,5
WEIGHT (kg)				
Unladen weight ⁽⁶⁾		2310	2310	2370
Unladen weight front axle		1615/695	1615/695	1640/730
Gross Vehicle Weight (GVW)		5500		
Front/rear total weight		2100 / 3980		
Max trailer weight unbraked / Max trailer weight braked		750 / 3500		

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 1865/1945 – 1945/2120 – 2120/2275
4. Curb to curb turning diameter
5. Wheelbase modified (see thw optional equipment)
6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded, NEES + 35 Kg (25/10).

M 55 - Wheelbase (mm) E 2500 - F 2750 - H 3350

JANUARY 2020

Equipment	NEES 2	
	Right-hand drive (Wheelbase E/F NEES 2) (*)	
(*)according to availability		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD – SCR • MID display • Engine exhaust brake • Side mirrors heated and electric • Immobilizer 	<ul style="list-style-type: none"> • Power operated windows • Suspended seat • Fog lamps Fr and Rr • Reverse warning buzzer • Radio DAB+ with USB • Central locking with remote control 	<ul style="list-style-type: none"> • Head lamps control levelling • Day-time running lights • Steering adjustable (tilting and height) • Speed limiter (90km/h)
Optional	. Air conditioning	
	. Wheelbase modified	
	. Body builder Controller	
Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 CV) a 2800 rpm TORQUE 375 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS (Advanced Emergency Braking System) SRS Driver Airbag	
Tank	L 68 Wheelbase E - F – L 93 Wheelbase H	L 16 Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 4.300 (43/10)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 65 mm, Height 180 mm, Thickness 4 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

ISUZU

SERIES N - F

VERSION Euro VI OBD-D

For further information
ISUZU MOTORS LIMITED

www.isuzu.ba

