

ISUZU


SERIES N-7,5T
VERSION Euro VI OBD-D



EDITION 2020

Série Bleu

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDT Europe can be considered responsible if any of this information is incorrect.

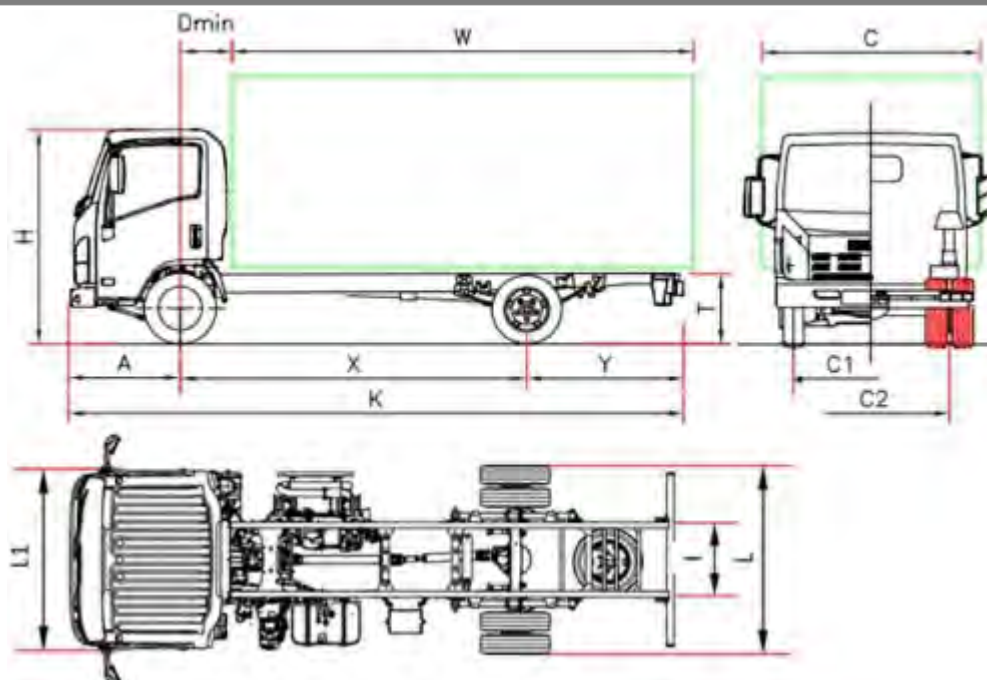


P 75		P 75 F	P 75 H	P 75 K	P 75 M
Wheelbase	X	2900 ⁽⁶⁾	3365	3815	4475
Overall length	K	5570	6040	6690	7870
Body length min. ⁽¹⁾	W	3750	4220	4870	6050
Body length Max. ⁽¹⁾	W	3930	4555	5185	6365
Rear overhang	Y	1560	1565	1765	2285
Chassis height	T	800			
Overall height	H	2265			
Rear axle width	L	2115			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	C	2345			
Front axle to back of cab	D min	710 ⁽⁷⁾			
Front overhang	A	1110			
Frame internal size	I	850			
Front track	C1	1680			
Rear track	C2	1650			
Minimum Road Clearance	-	210			
Turning diameter (m) ⁽⁴⁾	-	11,1	12,6	14,1	16,3
WEIGHT (kg)					
Unladen weight ⁽⁵⁾		2720	2720	2740	2780
Unladen weight front axle		1750/970	1750/970	1770/970	1835/945
Gross Vehicle Weight (GVW)		7500			
Front/rear total weight		3100 / 5800			
Max trailer weight unbraked / Max trailer weight braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg (25/10)
6. Wheelbase modified (see thw optional equipment)
7. NEES II 650.

P 75 - Wheelbase (mm) F 2900 - H 3365 - K 3815 - M 4475

JANUARY 2020

Equipment	NEES 2	
	Right-hand drive (Wheelbase F - H NEES)	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Power operated windows • Suspended seat • Fog lamps Fr and Rr 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Head lamps control levelling • Day-time running lights • Steering adjustable (tilting and height) • Speed limiter (90km/h)
Optional	. Air conditioning	
	. Wheelbase modified	
	. Body builder Controller	
Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 CV) a 2800 rpm TORQUE 375 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS – Sistema di allerta superamento corsia AEBS (Advanced Emergency Braking System) SRS 2 Airbag (Driver/Pass.)	
Tank	L 90	L 16 Ad-Blue®
Gearbox and Final drive ratio	6 gear MYY6S – 5.979 - 3.434 - 1.832 - 1.297 - 1.000 - 0.759; Reverse 5.068; Final gear ratio 5.571 (39/7)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

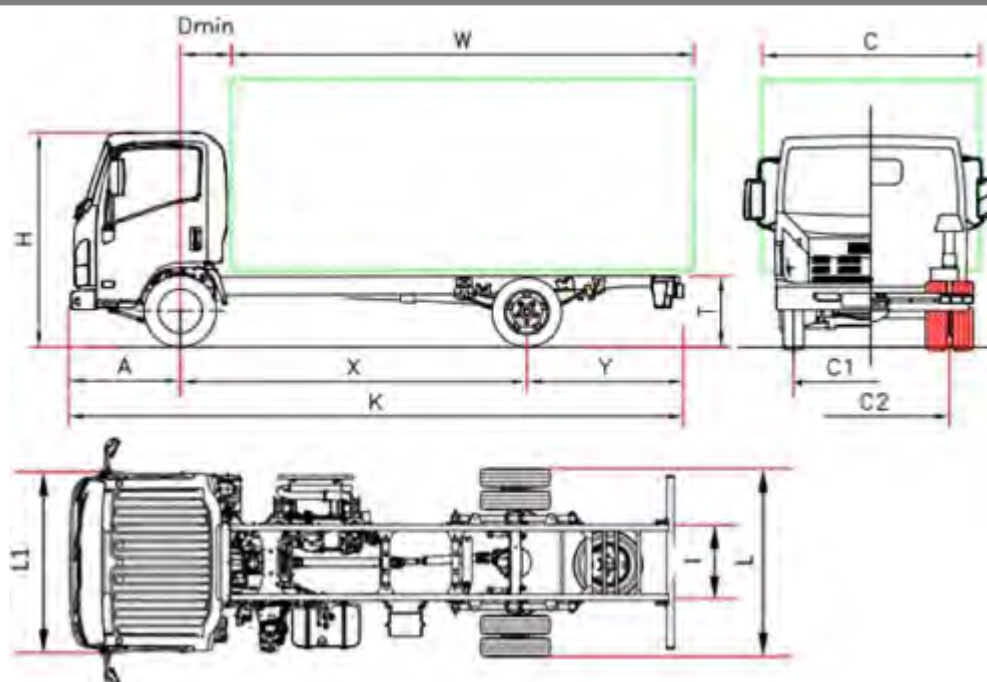


P 75		P 75 F	P 75 H	P 75 K	P 75 M	P 75 Q
Wheelbase	X	2900 ⁽⁵⁾	3365	3815	4475	5300 ⁽⁵⁾
Overall length	K	5570	6040	6690	7870	9282
Body length min. ⁽¹⁾	W	3810	4280	4930	6110	7522
Body length Max. ⁽¹⁾	W	3990	4615	5245	6425	7890
Rear overhang	Y	1560	1565	1765	2285	2872
Chassis height	T			800		
Overall height	H			2265		
Rear axle width	L			2115		
Cab width ⁽²⁾	L1			2040		
Body width ⁽³⁾	C			2345		
Front axle to back of cab	D min			650		
Front overhang	A			1110		
Frame internal size	I			850		
Front track	C1			1680		
Rear track	C2			1650		
Minimum Road Clearance	-			210		
Turning diameter (m) ⁽⁴⁾	-	11,1	12,6	14,1	16,3	19,0
WEIGHT (kg)						
Unladen weight ⁽⁶⁾		2960	2960	2990	3010	3110
Unladen weight front axle		1950/1010	1950/1010	1980/1010	2030/980	2080/1030
Gross Vehicle Weight (GVW)		7500				
Front/rear total weight		3100 / 5800				
Max trailer weight unbraked / Max trailer weight braked		750 / 3500				

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500
4. Curb to curb turning diameter
5. Wheelbase modified (see thw optional equipment)
6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg 25/10).

P 75 - Wheelbase (mm) F 2900 - H 3365 - K 3815 - M 4475 - Q 5300

JANUARY 2020

Versioni ed equipaggiamenti	NEES 2 + Cruise Control	
	Right-hand drive (Wheelbase F - H)	
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Suspended seat • Fog lamps Fr and Rr • Radio DAB+ with USB • Reverse warning buzzer 	<ul style="list-style-type: none"> • Power operated windows • Steering adjustable (tilting and height) • Head lamps control levelling • Day-time running lights • Speed limiter (90km/h)
Optional	<ul style="list-style-type: none"> . Air conditioning . Wheelbase modified . Body builder Controller 	
Engine	ISUZU 4HK1E6C Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 5193 cm ³ POWER 140kW (190 CV) a 2600 rpm TORQUE 510 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS (Advanced Emergency Braking System) SRS 2 Airbag (Driver/Pass.)	
Tank	L 90	L 16 Ad-Blue®
Gearbox and Final drive ratio	6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse 6.369; Final gear ratio 4.100 (41/10)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

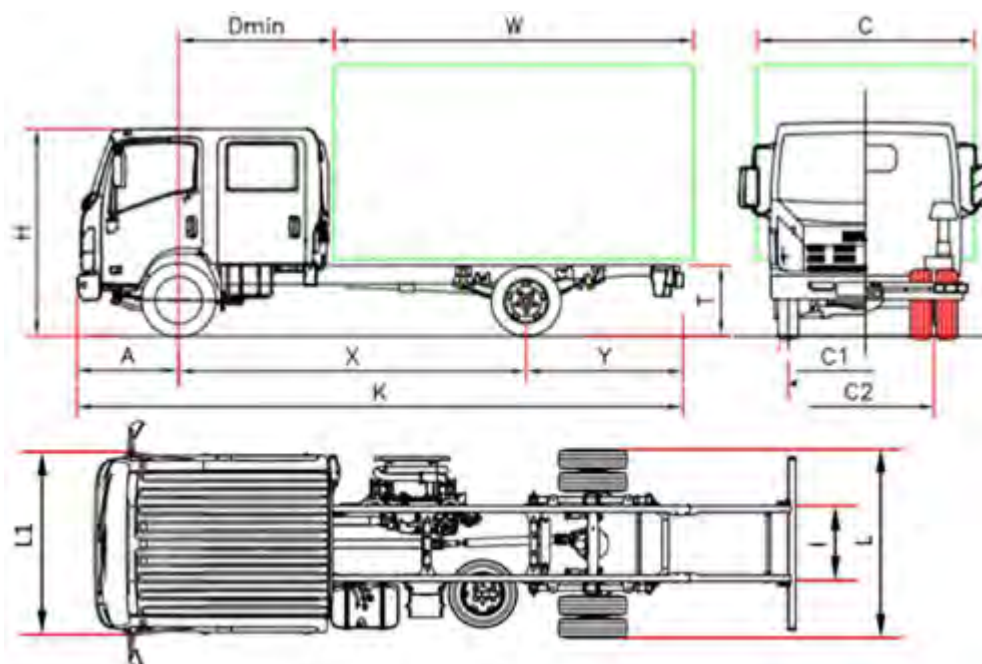

P 75		P 75 H	P 75 M	P 75 Q
Wheelbase	X	3365 ⁽⁵⁾	4475	5300 ⁽⁵⁾
Overall length	K	6040	7870	9282
Body length min. ⁽¹⁾	W	3230	5060	6472
Body length Max. ⁽¹⁾	W	3684	5375	6840
Rear overhang	Y	1565	2285	2872
Chassis height	T		800	
Overall height	H		2280	
Rear axle width	L		2115	
Cab width ⁽²⁾	L1		2040	
Body width ⁽³⁾	C		2345	
Front axle to back of cab	D min		1700	
Front overhang	A		1110	
Frame internal size	I		850	
Front track	C1		1680	
Rear track	C2		1650	
Minimum Road Clearance	-		210	
Turning diameter (m) ⁽⁴⁾	-	12,6	16,3	19,0
WEIGHT (kg)				
Unladen weight ⁽⁶⁾		3235	3265	3365
Unladen weight front axle		2185/1050	2200/1065	2250/1115
Gross Vehicle Weight (GVW)			7500	
Front/rear total weight			3100 / 5800	
Max trailer weight unbraked / Max trailer weight braked			750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500
4. Curb to curb turning diameter
5. Wheelbase modified (see thw optional equipment)
6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg (25/10)

P 75 CREW - Wheelbase (mm) H 3365 - M 4475 - Q 5300

JANUARY 2020

Equipment	NEES 2 + Cruise Control	
Standard features	<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric • Immobilizer • Central locking with remote control • Power operated windowsSpeed limiter (90km/h) • Fog lamps Fr and Rr • Head lamps control levelling • Day-time running lights • Radio DAB+ with USB • Steering adjustable (tilting and height) 	
Optional	<ul style="list-style-type: none"> . Air conditioning . Wheelbase modified . Body builder Controller 	
Engine	<p>ISUZU 4HK1E6C Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 5193 cm³ POWER 140kW (190 CV) a 2600 rpm TORQUE 510 Nm/1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.</p>	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS – Sistema di allerta superamento corsia AEBS (Advanced Emergency Braking System) SRS 2 Airbag (Driver/Pass.)	
Tank	L 90	L 16 Ad-Blue®
Gearbox and Final drive ratio	6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse 6.369; Final gear ratio 4.100 (41/10)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm	
Number of seats	7	
Axle	2 the rear one with twin wheels.	
Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings.. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

ISUZU

SERIES N - F

VERSION Euro VI OBD-D

For further information
ISUZU MOTORS LIMITED

www.isuzu.ba



EDITION 2020 | Série Bleu

04/2020



Midi Europe advises

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe information is incorrect.